

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

## ASSEMBLING THE FIXTURE

1. Carefully remove the fixture from the carton and check that all parts are included as shown in figure 1. Be careful not to misplace any of the screws or parts that are needed to install this fixture.
2. Measure the desired length of the SVT cord from the canopy to the glass. Leave some additional cord above the canopy for wire connection.
3. Thread the plastic lock tight washer through the wire and use it to control the length of wire from the canopy to the glass you desired.
4. Make wire connections with wire nuts :
  - Connect White wires from the fixture to White wire from power source with a White nut.
  - Connect Black wires from the fixture to Black wire from power source with a Black nut.
  - Fasten Green Ground wires from outlet box and Fixture Ground wire to crossbar with Green Ground Screw. Attach Canopy Green Ground wire to mounting screw in crossbar.
5. Tuck the wires carefully inside the outlet box.
6. Mount crossbar securely to outlet box with 2 mounting screws through slot in crossbar.
7. Lock the lock nut and washer to thread nipple in the canopy.
8. Fix the canopy to the crossbar by the thread nipple.
9. Place the glass shade (A) or (B) on the socket and fix it tightly with the socket ring (C) or socket ring with coupling (D)
10. Install the light bulbs in accordance with the fixture's specification: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Your installation is now complete. Return power to the junction box and test the fixture.

**Fig 1.**

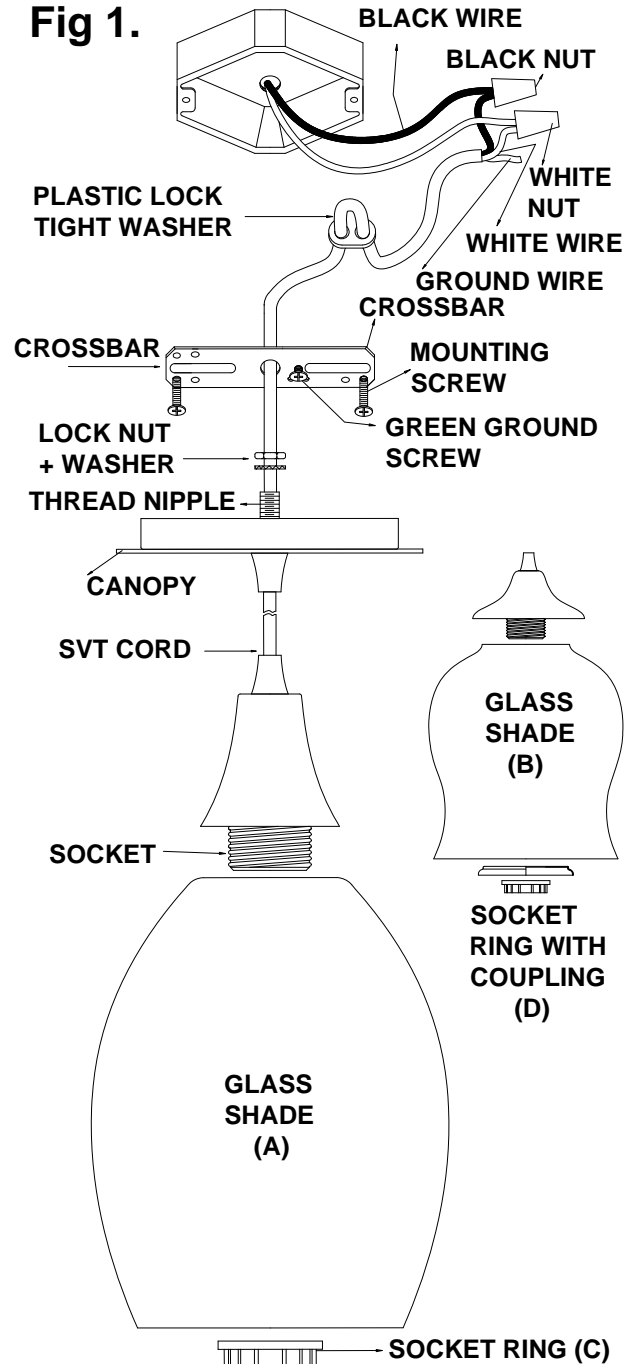

**Fig 2**

