


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

## WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Assemble the nipple(A) onto the cross bar and lock it in place by hex nut.
2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
3. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
4. Determine the quantity/length of stem/stems needed.
5. Thread one stem onto the nipple(B) and thread one stem nipple onto the stem.
6. Feed fixture wires and ground wire through the nipple(B) or stem nipple and stem.
7. Thread the other stem nipple onto the other stem and thread them onto top of the stem.
8. Repeat step 6 and step 7 until all desired stems are connected, then thread the fixture loop onto top of the stems.
9. Hook quick links onto the both ends of the chain and hang the chain to the top loop and the fixture loop.
10. Weave fixture wires and ground wire through the fixture loop, every other quick and chain links, top loop, top nut, canopy and nipple(A) and then secure the top loop to the nipple(A).
11. Make wire connections :  
 --Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.  
 --Attach white wire from light to white wire from power source with a wire nut.  
 --Attach black wire from light to black wire from power source with a wire nut.  
  
 Observing : positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
12. Tuck the wire connections neatly into the outlet box.
13. Attach the canopy to the ceiling, then secure it with the top nut.
14. Thread nipple into one end of the circle(C) and circle(B), and then thread nuts onto the nipple from inside of the circle(C) and circle(B). Finally, fix the circle(C) and circle (B) with the two iron parts.
15. Thread nipple into each one end of the two circle(B), then thread one nut onto the nipple from inside of one of the circle(B), cover the nipple by iron pipe. Thread the other nut onto the nipple from inside of the other circle(B). Fix two circle(B) with the two iron parts.
16. Repeat step 14 to have all circle(B) and circle(A) secured in place.
17. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
18. Turn on the power at fuse or circuit box.

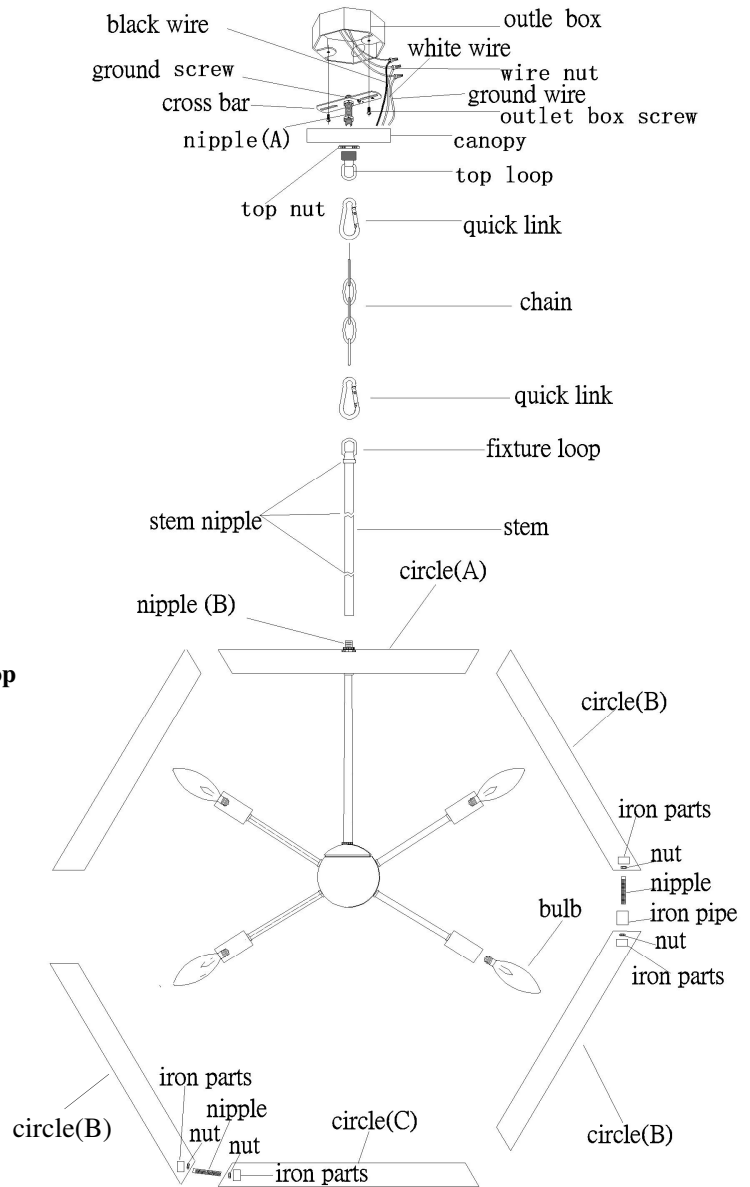

865-8-0880

865-8-3280

866-8-0880

866-8-3280