ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF


POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

- 1. Assemble the nipple onto the cross bar and lock it in place by hex nut.
- 2. Attach the cross bar to outlet box using 2 outlet box screws upwards.
- 3. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
- 4. Determine the length of stem/stems you need.
- 5. Put the plastic pad onto the fixture nipple.
- 6. Thread one stem onto the fixture nipple, and then thread one stem nipple onto the stem.
- 7. Feed fixture wires and ground wire through the stem and stem nipple.
- 8. Thread the other stem nipple onto the other stem and thread them onto top of the stem.
- 9. Repeat step 6 to step 8 until all desired stems are connected, then thread the fixture loop onto top of the stems.
- 10. Hook chain links onto the both ends of the chain and hang the chain to the top loop and the fixture loop.
- 11. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop, top nut, canopy and nipple and then secure the top loop to the nipple.
- 12. Make wire connections:
 - --Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - --Attach white wire from light to white wire from power source with a wire nut.
 - --Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.

- 13. Tuck the wire connections neatly into the outlet box.
- 14. Attach the canopy to the ceiling, and secure it with top nut.
- 15. Put candle sleeve onto the socket.
- 16. Install bulb.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
- 17. Turn on the power at fuse or circuit box.

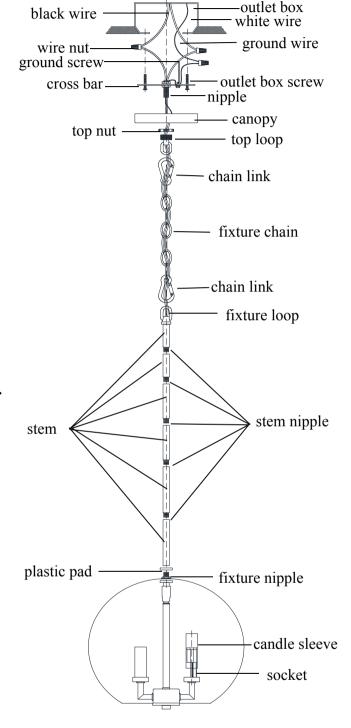

873-3-62 873-4-62 873-3-65 873-4-65 873-3-80 873-4-80