
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK,BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE:Before installing,consult local electrical codes for wiring and grounding requirements.

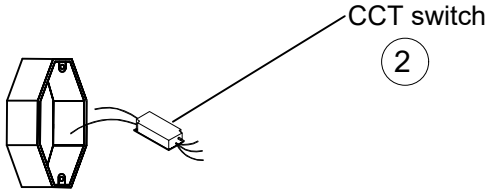

NOTICE:J-box must be secured to building structure

Fig.1

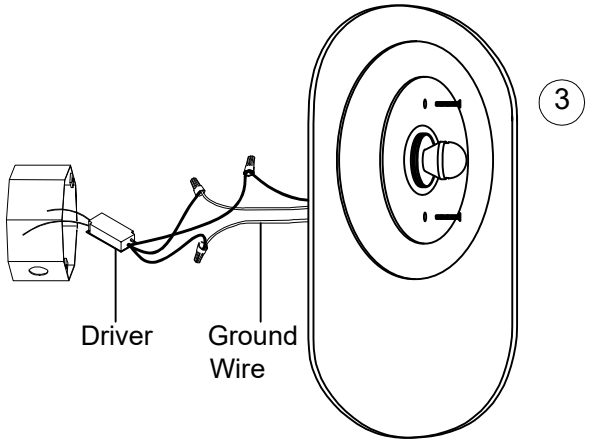


Fig.2

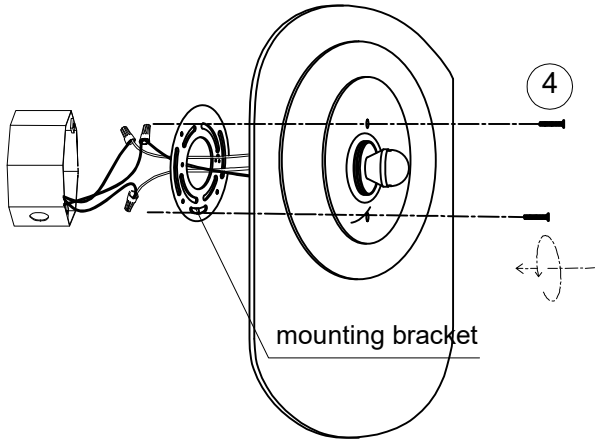


Fig.3


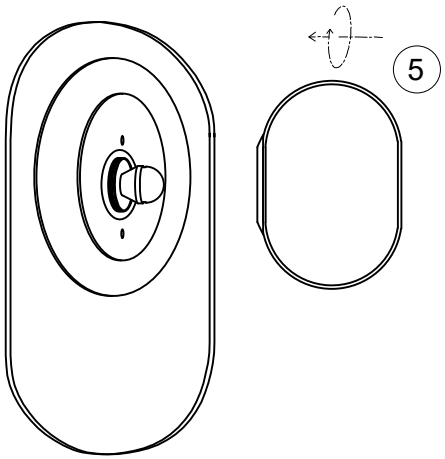


Fig.4

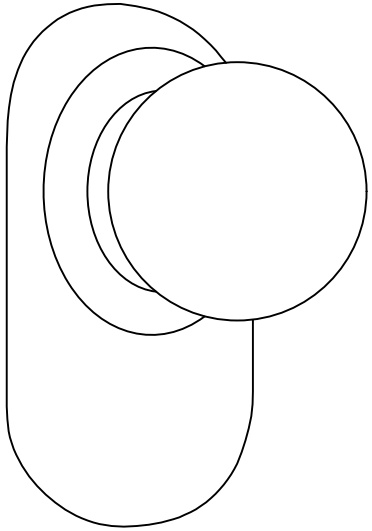

Quorum

QUORUM LIGHTING
201 RAILHEAD RD,FORT WORTH,TX 76106
TEL.(877) 607-0202 FAX.(877) 607-0203
WWW.QUORUMINTERNATIONAL.COM

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK,BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE:Before installing,consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clean surface. Take care not to lose any small parts necessary for installation.
2. Select desired CCT: 2700K,3000K, 4000K, 5000K,6500K on the CCT switch.(Fig.1)
3. Make wire connections: Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw. Attach black wire from building to black wire from fixture using wire nut. Attach white wire from building to white wire from fixture using wire nut. FOR DIMMING: If using a dimmer,follow wiring instructions enclosed with dimmer. Double check wiring.(Fig.2)
4. Place the driver inside the junction box. Then secure the mounting bracket and the fixture backplate to the outlet box with screws.(Fig.3)
5. Install the glass shade.(Fig. 4)
6. Turn power back on at fuse or circuit box.

BEKASI 1LT 5CCT LED WALL SCONCE - BRB

120-277V 9248-1-47