


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF  
WARNING: POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

## **Installation Steps.**

1. Select desired CCT: 3000K, 3500K, 4000K, on the CCT switch located in back plate (C).
2. Attach the mounting plate (A) to the outlet box using 2 outlet box screws (B).
3. Make wire connections :
  - Attach the ground wire to house ground wire using a wire nut.  
(Or attach them to the mounting plate (A) with a green ground screw.)
  - Attach white wire from light to white wire from power source with a wire nut.
  - Attach black wire from light to black wire from power source with a wire nut.
4. Attach the back plate (C) to mounting plate (A) by using 2 mounting screws (D).
5. Turn power on at fuse or circuit box.

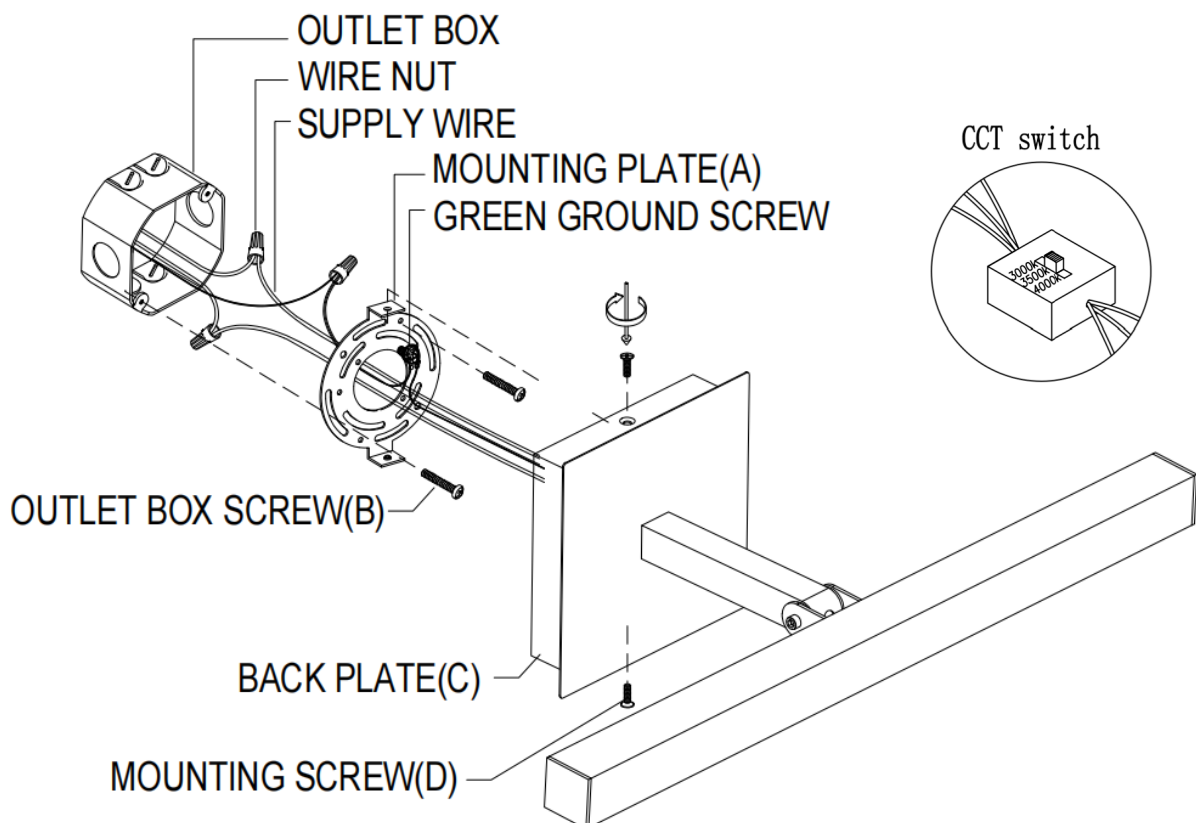

#940-18-xx

#940-23-xx

#940-30-xx