


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirement.

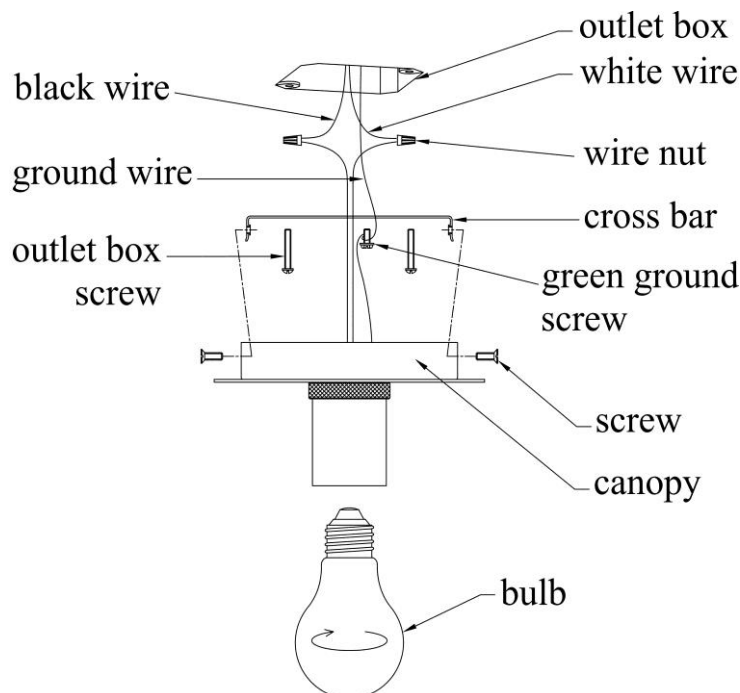

## Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.
2. Thread 2 mounting screws properly into the 2 relevant mounting holes pre-drilled on the cross bar.
3. Attach the cross bar to the outlet box by using 2 outlet box screws upwards.

### 4. Make wire connections:

- Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
- Attach white or ribbed wire from light to white wire from power source with a wire nut.
- Attach black or smooth wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire, round wire with ground wire

\*\*\* Make sure all wire connectors are secured and do not easily pull off with the slight tug.

5. Attach the canopy to Outlet box then fasten it by using 2 mounting screws.
6. Install bulb. (Please do not exceed the maximum capacity which is recommended on the fixture.)
7. Turn on the power at fuse or circuit box.

322-xx