
ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

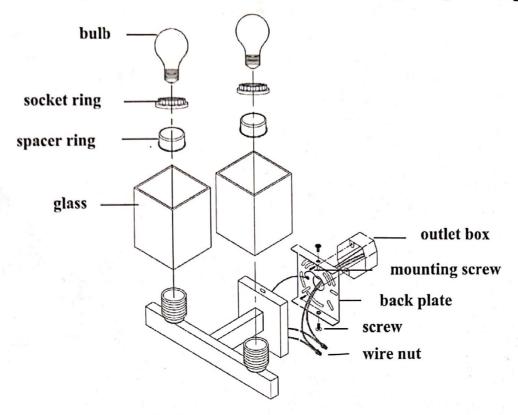

Installation Steps

- 1. Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.
- 2. Secure the back plate to outlet box by using 2 mounting screws and to the wall by using the 2 anchor screws with anchors.
- Make wire connections:
 - —Attach ground wire to house ground wire using a wire nut or attach them to the back plate with a green ground screw.
 - -Attach white wire from light to white wire from power source with a wire nut.
 - -Attach black wire from light to black wire from power source with a wire nut.

Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.

- *** Make sure all wire connectors are secured and do not easily pull off with the slight tug.
- 4. Tuck the wire connections neatly into the outlet box.
- 5. Place the fixture front plate to back plate by using 2 screws each at top and bottom screwed together.
- 6. Put spacer ring on the socket then Install bulb with socket ring and glass.
- 7. Turn on the power at fuse or circuit box.

5476-x-xx series 5076-x-xx series