


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:

TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF
POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Thread the nipple(C) onto the coupler(B), thread the nut(B) onto the nipple(C). Let the column pass through the nipple(C), thread the nut(C) onto the nipple(C), put the pad(A) onto the nipple(C), then secure them by fixture loop.
 2. Assemble the nipple(A) onto the cross bar and lock it in place by hex nut.
 3. Attach the cross bar to outlet box using 2 outlet box screws upwards.
 4. Determine the length of the chain you need using pliers to disconnect the extra chain and discard it away.
 5. Weave fixture wires and ground wire through the fixture loop, every other chain links, top loop, top nut, canopy and nipple(A); secure the top loop to the nipple(A) and hang the chain to the top loop and fixture loop.
 6. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
 - Attach white wire from light to white wire from power source with a wire nut.
 - Attach black wire from light to black wire from power source with a wire nut.
- Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
7. Tuck the wire connections neatly into the outlet box.
 8. Attach the canopy to the ceiling and secure it with top nut.
 9. Thread the nipple(B) onto the coupler(A), thread the nut(A) onto the nipple(B), let the cover pass through the nipple(B), then secure them by finial.
 10. Screw the fixture arm by ball nuts.
 11. Put glass shade onto the socket and fix it with tube. Attach the deco.drops onto the fixture.
 12. Install bulbs. (not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
 13. Turn on the power at fuse or circuit box.

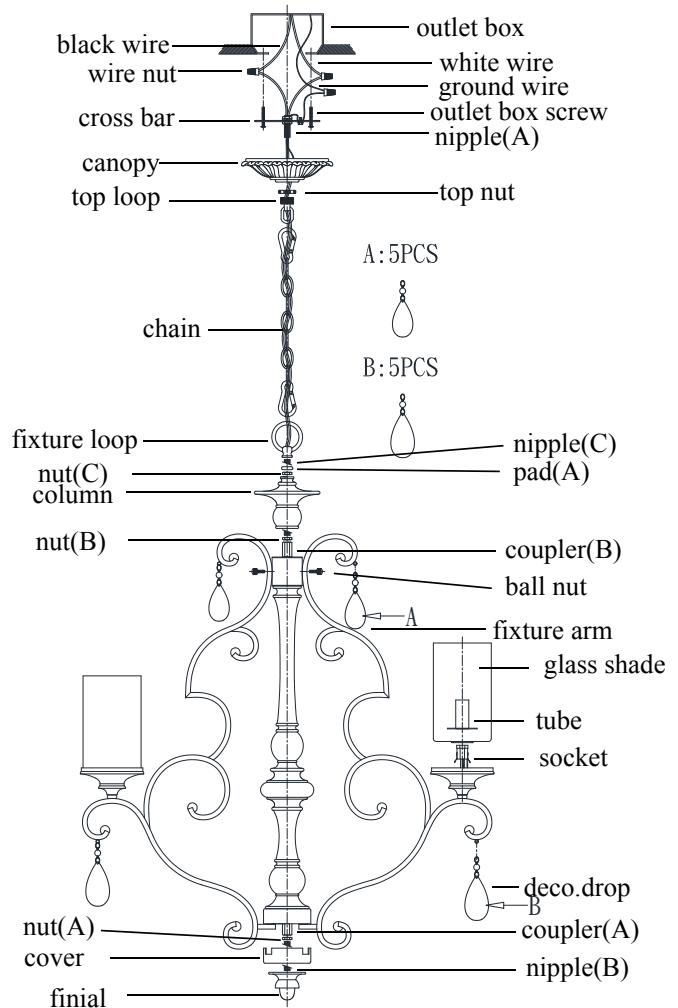

6073-5-39

6073-5-70