


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK ,BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE .

NOTE : Before installing ,consult local electrical codes for wiring and grounding requirement

1. Turn the Arms (A) to its proper position.
2. Thread the nipple with hex nut (C) into the coupling (B) and thread it with hex nut.
3. Attach the fixture ring (J) onto the ARM (H) and let the mounting hole (I) aligned, then fix it by ball screws (F).
4. Slide the cap (D) onto the nipple (C) and secure them with finial (G).
5. Put space tube (E) onto the socket (F).
6. Assemble the Nipple (A) onto the Cross bar, and lock it in place by Hex nut (A).
7. Attach the Cross bar to outlet box using 2 outlet box screws upwards.
8. Determine the length of the Chain you need using pliers to disconnect the extra chain and discard it away.
9. Weave fixture wires and ground wire through the every other chain links, top nut, canopy, top loop and Nipple (A); secure the top loop to the Nipple (A) and hang the chain to the top loop and the fixture loop.
10. Make wire connections :
 - - - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
 - - - Attach ribbed wire from light to white wire from power source with a wire nut.
 - - - Attach smooth wire from light to black wire from power source with a wire nut.
11. Tuck the wire connections neatly into the Outlet box.
12. Attach the canopy to the ceiling, then secure with top nut.
13. turn power on at fuse or circuit box.

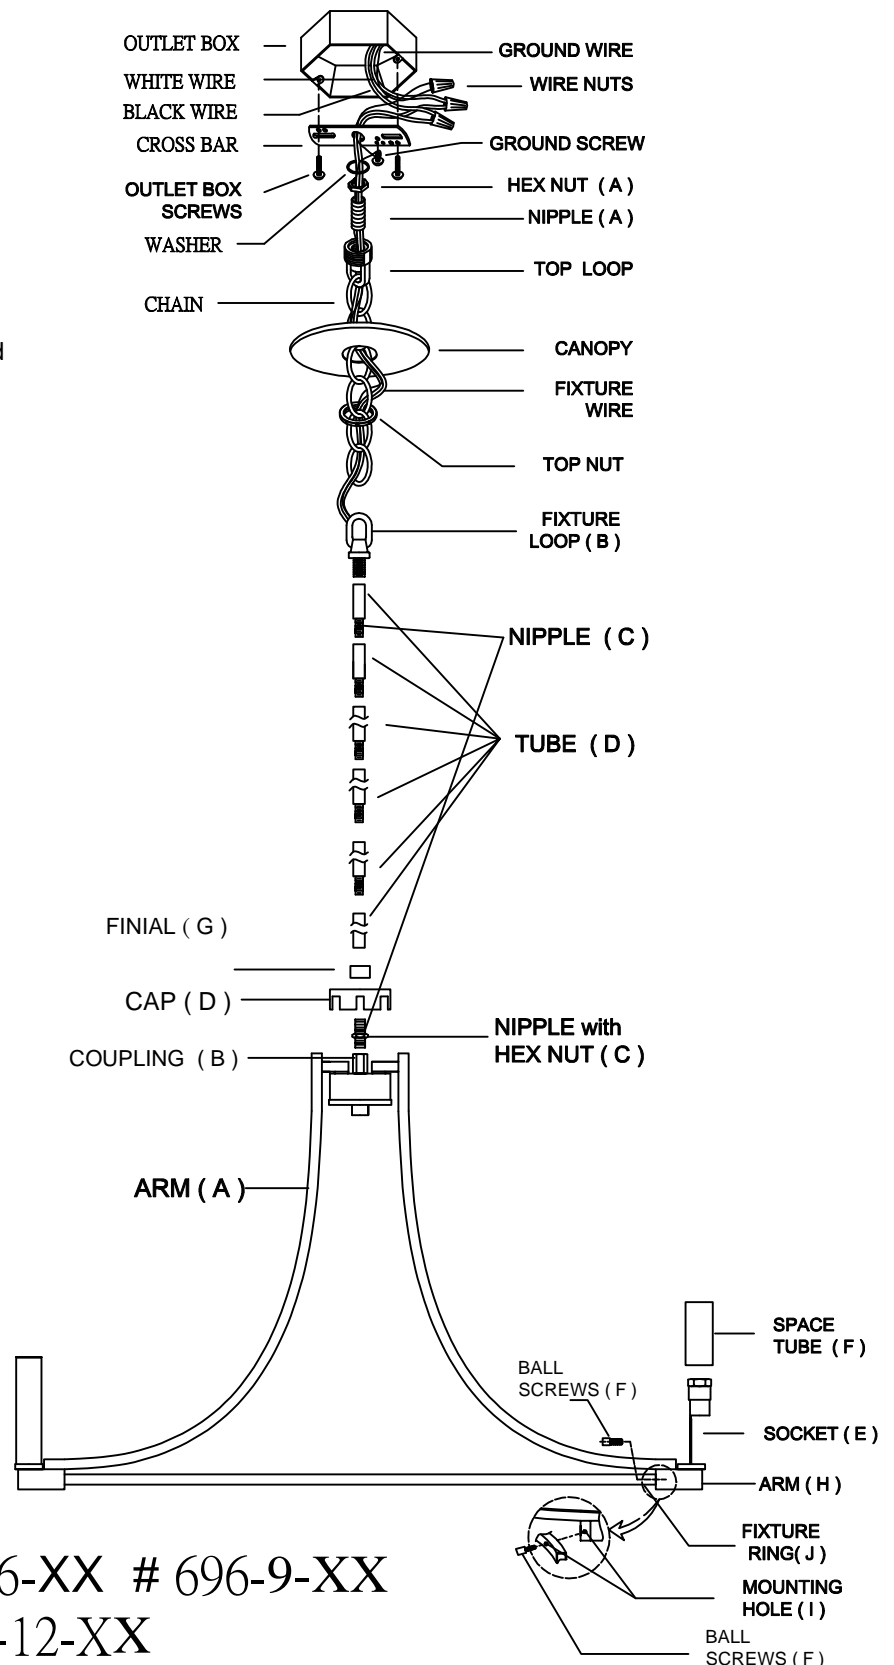

696-6-XX # 696-9-XX
696-12-XX